

TECHNOLOGY

**HOLYKELL®**

# **HPT604-LT**

## **LEVEL**

• DATASHEET •

- 1. Pressure Measurement**   **2. Level Measurement**   **3. Temperature Measurement**  
**4. Flow Measurement**   **5. Display & Control Instruments**  
**6. Wireless Monitoring System**   **7. Velocity Measurement**

# HPT 604-LT

## Submersible Fuel Level Pressure Transducer & Transmitter



### Applications

- Level Measurement in Bio-Fuels
- Monitoring of Gasoline & Diesel Fuel Tanks
- Level Measurement in Ballast Tanks
- Level Measurement in Oil Tanks
- Monitoring of Contain Coolant for Diesel Engines
- Level Measurement in Adblue Tanks
- Level Measurement in Kerosene

### Features

- Imported GE pressure cells, 0.5%F.S.
- Survives Harsh Environments
- EMI/RFI Protection
- Custom level ranges from 1m to 50m
- Unique impurities filter mesh design
- IP68 full sealed plastic water proof design
- CE, RoHS and ATEX Approved
- Custom PU or FEP cable length
- Resolution up to 0.1mm (range less than 6m)

### Profiles

HPT604-LT is a high performance submersible pressure level transducer, which is suitable for level and temperature measurement of different types of fuels, besides, it solves the problem of measurement of the oil level in irregular tanks, which might challenge other similar sensors. It can not only measure liquid level but also volume and percentage. The problems that influence by temperature drift received and poor accuracy in the whole temperature span are also solved.

It consists of the U.S.A imported GE piezoresistive sensing element encased in full SUS304 housing. The device comes equipped with a 270-pound tensile strength shielded and vented cable. Vented tube in the cable automatically compensates for changes in atmospheric pressure above the tank. The vent is protected with a maintenance free filter eliminating particulate or water droplets from entering the transducer.

HPT604-LT incorporates lightning and surge protection utilizing dual arrestor technology to assure under the input and output short-circuit conditions to protect prevent reverse connection.

Holykell can provide a cost effective solution for level monitoring for a variety of applications. Welcome your inquiry.



### Measuring range

bar	0 to 0.05 ... 0 to 2
inWC	0 to 20 ... 0 to 800
psi	0 to 1.0 ... 0 to 30
m fuel	0 to 0.5 ... 0 to 20

When choosing the FEP cable, only measuring ranges up to 0 ... 2 bar, 0 ... 30 psi and 0 ... 20 m fuel are available. The given measuring ranges are also available in mbar, kPa and MPa

### Materials

Wetted Parts	Standard	Optional
Case and sensor	Stainless steel 304	Ceramic
Protection cap	Stainless steel 304	PP
Cable	PUR	FEP

### Mounting position


Calibrated in vertical mounting position with pressure connection facing downwards.

### Specifications

Ambient Temperature: 25°C (unless specified)


Parameter	HPT604 (LT Type)
Pressure Range	0-0.1bar.....2bar / 0-1m.....20m fuel level Optional (See P1 page description)
Overload	200% F.S.
Burst Pressure	500% F.S.
Accuracy	≤ ±0.5%F.S (≥2m level range and between 0-50 degree C); ≤ ±1.0%F.S (0.5m≤Level Range<2m level range and between 0-50 degree C)
(Linearity Hysteresis	Including non-lin., rep. and hys.
Repeatability)	Optional
Long-term Stability	≤ ±0.1 % of span/year
Temperature Range	-30 to +70 degree C
Temperature Accuracy	±1%F.S. (± 1 °C)
Working Temp.	-40-80°C(non-corrosive medium)
Storage Temp.	-40°C~80°C(Nitrile rubber sealing ring); -20°C~80°C(fluororubber rubber sealing ring)
Temperature Compensation	0-80°C
Medium compatible	Compatible with SUS304 Stainless Steel
Electronic Wire	4 wires
Output	RS485 Modbus RTU
Power Supply	3.5-36Vdc
Polarity protection	Available for signal wires or Power wires each other reverse, unavailable signal and power wire reverse!
Insulate resistance	> 100M Ω@100V
Zero Temp. Drift	0.2%FS/°C ( ≤100kPa ) ; 0.1%FS/°C ( >100kPa )
FS Temp. Drift	0.02%FS/°C ( ≤100kPa ) ; 0.01%FS/°C ( >100kPa )
Electronic connection	Fixed cable with vented tube, IP68 rated
Response time	≤200ms
Data overtime interval	≥50ms
Blind Zone of Probe	5 mm
Pressure Type	Gauge pressure
Certificate	Exia IICT6, TUV RoHS and CE Certificate
EMC Standard	EN 61326-1:2013; EN 61326-2-3:2013 EN 61000-6-2:2005; EN61000-6-4:2007+A1
Lightning Protection (optional functions)	Surge ±2000V, Air conduction ±8000V; contact discharge ±4000V protection.
Cable optional	Cable materials are optional according request, we offer 3 type special cable as follow: PE Cable ( Water Proof ) ; PU Cable ( Diesel Proof ) ; FEP Cable ( Anti-Corrosive for gasoline )


**Dimensions and Drawing**

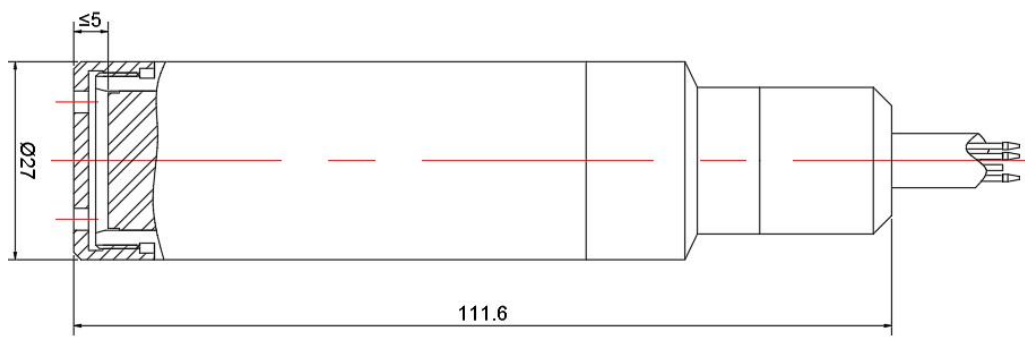

Unit: mm

**Electronic Connections**

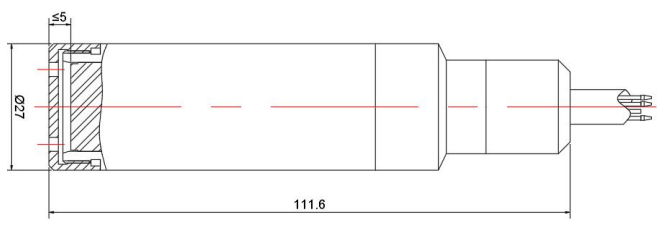

Directly sealed cable		
 RS485 RTU Modbus	Red	V <sub>cc+</sub>
	Black	GND
	Green	RS485A
	Blue	RS485B
	Yellow	Shield

### How to Order

#### 1. Range Selection Table:

		01	0~1.0	02	0~1.1	03	0~1.2	04	0~1.3	05	0~1.4	06	0~1.5	07	0~1.6	08	0~1.7
09	0~1.8	10	0~1.9	11	0~2	12	0~2.1	13	0~2.2	14	0~2.3	15	0~2.4	16	0~2.5	17	0~3
18	0~4	19	0~5	20	0~6	21	0~7	22	0~8	23	0~10	24	0~12	25	0~15	26	0~16
27	0~20											X	By Customized				

Kindly according to your application select suitable range code , Example: code 19 = 5 .

Unit of measure select on the Part Number Selection Table . Example: Code F=m Fuel , that's 5m Fuel









#### 2. Part Number Selection Table:

<b>604LT</b> Selection Type	<b>11</b>	<b>F</b>	<b>G</b>	<b>E11</b>	<b>S42</b>	<b>D1</b>	<b>N</b>	<b>1</b>	<b>003</b>
Range	Range reference to range selection table code								
Pressure & Level Units	F=m Fuel (Min: 1 m; Max:20 m ) B=bar (Min: 0.1bar Max: 2bar) P=Psi (Min:1Psi; Max:30Psi) K= kPa (Min:10 kPa; Max:200 kPa)								
Pressure type	G=Gauge/Relative pressure type A=Absolute pressure (customize)								
Signal Output	E11=RS485(MODBUS)								
Power Supply	S42=3.5-36Vdc								
Measuring Medium	CW=Water    D1=0.84g/cm3 density diesel    D2=0.83g/cm3 density diesel D3=0.85g/cm3 density diesel    D4=0.86g/cm3 density diesel G2=0.725g/cm3 density gasoline    G5=0.737g/cm3 density gasoline X=Others Liquid and Density By Customized								
Others Function (Optional)	N=5 mm blind zone type PPC=PP material cap/filter cover    FC= Anti-corrosion FEP cable (gasoline application) TF=Additional Terminal box and Flange mounting 10=1/2"NPT male Electronic connector mounting								
Accuracy	0=1.0%F.S@0~50 degree C (Min 0-2mH2O),1.5%F.S@0~50 degree C (Min 0-1mH2O); 1=0.5%F.S@0~50 degree C (Min 0-2mH2O),1.0%F.S@0~50 degree C (Min 0-1mH2O); 2=0.25%F.S@0~50 degree C (Min 0-2mH2O),0.5%F.S@0~50 degree C (Min 0-1mH2O); (Code 0 is typical, Code 1 is full temp span high accuracy type, Code 3 is high price customize type )								
Cable length	001= Cable 1M	002= Cable 2M	003= Cable 3M	X= By customized					

Example P/N: 604LT11FGE11S42D1N1003

### Accessories

(Notes: Please purchase separately. For the price of accessories, please contact our sales.)

	Description	Order number
	<b>Liquid level display control device</b> With all kinds of liquid level sensor, measurement according to liquid level, and according to the setting of the container structure and size and the density of liquid, calculation, display liquid volume or quality.	0008
	<b>Flange</b> 4 holes 316 SS flange, size can be customized 3 holes 304 stainless steel flange 70mm diameter	0001 0030
	<b>Locking flange</b> For locking cables, made of aluminum alloy	0029
	<b>Conduit adapter</b> 316 SS 1/2" NPT male cable conduit adapter. Must be factory installed.	0011
	<b>Terminal box</b> The terminal box, with IP67 ingress protection and watertight ventilation element, provides a moisture-free electrical termination for the submersible pressure transmitter. It should be mounted in dry environment or directly in the switch cabinet.	0003
	<b>Additional weight</b> The additional weight increases the dead weight of the submersible pressure transmitter. It simplifies the lowering into monitoring wells, narrow shafts and deep wells. It effectively reduces negative environmental influences on the measuring result from the measured medium (e.g. turbulent flow). Stainless steel 316L, approx. 1.46kg, height (H) 70 mm	0009
	<b>Adapter Converter</b> It is able to convert RS-232 signal to RS-485 balanced differential signal and extend the communication distance to 1.2km. It uses a particular pump to gain power from RS-232 signal (RTS, DTR, TXD) without initializing the RS-232 series interface. This interface converter does this without requiring any AC or DC power.	0005
	<b>Surge Protection Box</b> Surge electrostatic protector Anti-surge $\pm 2000V/\pm 4000V$ , anti-static 18KV, suitable for protecting 4-20ma and RS485 circuits.	0014

### Ordering information

Model / Measuring range / Pressure type / Output signal / Power supply / medium / others option / Accuracy / Cable length / Accessories