

TECHNOLOGY

HOLYKELL®

HPT200-G

PRESSURE

• DATASHEET •

- 1. Pressure Measurement** 2. Level Measurement 3. Temperature Measurement
4. Flow Measurement 5. Display & Control Instruments
6. Wireless Monitoring System 7. Velocity Measurement

HPT200-G

LED/LCD Indicator Pressure Transducer & Transmitter

Applications

- Industrial process control
- Biomedical
- Eco saving
- Energy and water treatment
- Petroleum, chemical industry
- Metallurgy
- Hydrology, agriculture, food industry

Features

- With 4-1/2 bits LED display
- 2 times range standard overload
- 5 times range burst pressure
- Fully Welded Stainless Steel Housing
- Surge(lightning) protection
- EMI/RFI Protection
- Zero point and span adjustable
- CE, RoHS certificate approved

Profiles

HPT200-G digital smart industrial pressure transmitter with LED/LCD display adopts high quality imported piezoresistive pressure sensor, it can read value locally, and is easy for use. It has a fully welded 316L stainless steel housing, with high shock and vibration resistance and EMI/RFI protection function. It will survive in the most extreme conditions.

HPT200-G offers continuous measuring ranges up to 1000 bar in all the major units. These measuring ranges can be combined in almost any way with all the standard industrial output signals, the most common international process connections and local indicator.

Special circuits are adopted to zero and full range conveniently. LED HPT200-G 4-20mA pressure sensor are approved with CE certificate.

Holykell can provide a cost effective solution for pressure monitoring for a variety of applications. Welcome your inquiry.



RoHS CE

Measuring range

bar	-1 to 0...0 to 1000
Kpa	-100 to 0...0 to 100000
psi	-15 to 0...0 to 15000
mbar	-1000 to 0...0 to 1000000

They give measuring range are also available in Mpa , Pa, in Hg, mm Hg


Materials

Wetted Parts	Standard	Optional
Case and sensor	SUS 316L	316 SST/SUS321
Filled Oil	Silicone oil	NA
Indicator	4 -1/2 bits LED	LCD

Ambient Temperature: 25°C (unless specified)


•WWW.HOLYKELL.COM•

Dimensions and Drawing

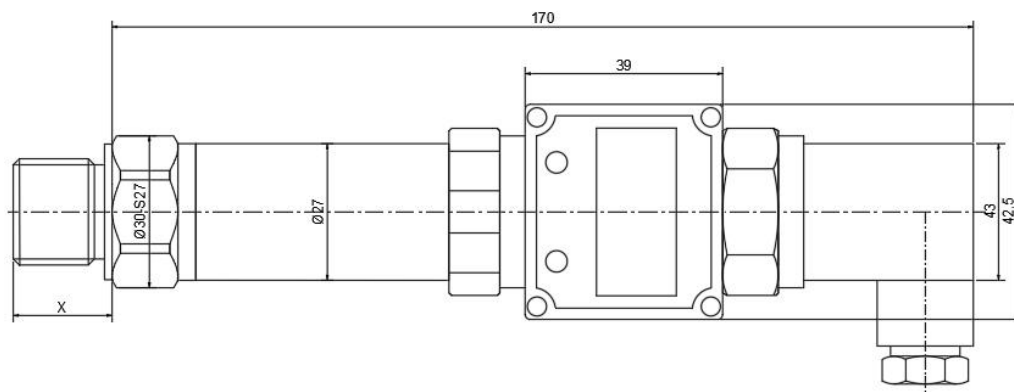

Unit: mm

Electrical Connection

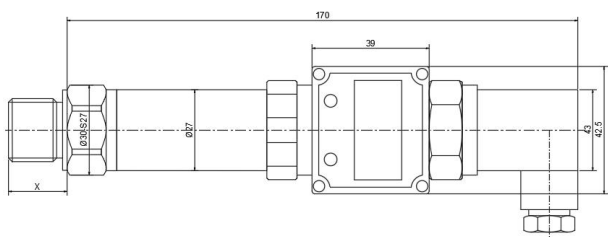

DIN 43650 Connector		
Current	1	Vcc+ / Red
	2	Si+ / Green
	3	NC
	4	Shield / Black
Voltage	1	Vcc+ / Red
	2	GND / Black
	3	Vout / Green

S=Signal, Vcc=Power Supply, GND=Vcc-&S-

Pressure Connections

M20x1.5 male	1/2" NPT male	1/4" NPT male	G1/2" male	G1/4" male
<p>M20x1.5 male</p>	<p>1/2" NPT</p>	<p>1/4" NPT</p>	<p>G1/2"</p>	<p>G1/4"</p>

How to Order

1. Range Selection Table:

01	-1~65	07	0~6	13	0~35	19	0~160	25	0~500			
02	-1~125	08	0~10	14	0~40	20	0~200	26	0~600			
03	0~1	09	0~16	15	0~50	21	0~250	27	0~1000			
04	0~2	10	0~20	16	0~60	22	0~300					
05	0~3	11	0~25	17	0~70	23	0~350					
06	0~5	12	0~30	18	0~100	24	0~400	X	By Customized			

Kindly according to your application select suitable range code , Example: code 17 = 70 .




Unit of measure select on the Part Number Selection Table . Example: Code B=Bar , that's 70 bar .

2. Part Number Selection Table:

200	G	17	B	G	E5	S11	3	E	1	002
Selection Type										
Electrical Connection	G= Hirschmann DIN43650									
Pressure Range	Range reference to pressure range selection table code									
Pressure Units	B=bar P=Psi K=KPa M=MPa H=mH2O									
Pressure type	G=Gauge/Relative A=Absolute									
Signal Output	E5=4-20mA(2 wire) E6=0-5V(3 wire) E0=1-5V(3 wire) X= By customized									
Power Supply	S10=12-30Vdc S11=7-30Vdc X= By customized									
Pressure connection	3= 1/4" NPT male 5=1/8" NPT male 6=G1/4" male 7=G1/4" Female 8=M20x1.5 male 9=G1/2" male 10 =1/2" NPT male X= By customized									
Other option	E= LED (4 1/2 digits) C= LCD (4 1/2 digits)									
Accuracy	1=0.5%F.S 2=0.25%F.S 3=0.1%F.S (by customized)									
Cable length	000=Non-Cable 001= Cable 1M 002= Cable 2M X= By customized									

Accessories

(Notes: Please purchase separately. For the price of accessories, please contact our sales.)

	Description	Order number
	Liquid level display control device With all kinds of liquid level sensor, measurement according to liquid level, and according to the setting of the container structure and size and the density of liquid, calculation, display liquid volume or quality.	0008
	Cooling device For thread attachment	0004
	Terminal box The terminal box, with IP67 and watertight ventilation element, provides a moisture-free electrical termination for the submersible pressure transmitter. It should be mounted in dry environment or directly in the switch cabinet.	0003

Order information

Model /Measuring range /Output Signal/Medium/Cable length/Case/Accessories