

TECHNOLOGY

HOLYKELL®

HPT611

LEVEL

• DATASHEET •

1. Pressure Measurement **2. Level Measurement** 3. Temperature Measurement
4. Flow Measurement 5. Display & Control Instruments
6. Wireless Monitoring System 7. Velocity Measurement

HPT 611

Anti Clog Attachment for Submersible Liquid Level Pressure Transmitter

Applications

- Sewage
- Lift stations
- Storm canals
- Reservoirs / dams
- Weirs, wells, pond, reservoir, and dam
- Sludge, slurry
- For sewage water tank level

Features

- All 316L stainless steel construction for durability
- Open double flange design
- Diaphragm is protected from physical damage and turbulence
- Added weight prevents movement of the transmitter
- Cable withstand over 200 pounds of strain
- Ingress protection up to IP68

Profiles

HPT611 a fully submersible level transducer is the cost effective solution for sewage or waste water with viscous medium level measurement. It consists of the U.S.A imported GE piezoresistive sensing element encased in a 316L SS housing. Its all stainless steel, hermetically sealed housing make it suitable for immersion for a long time in most industrial sewage and waste water .

Each submersible sewage level transducer has "Steel cage" design offers the highest reliability in level measurement for severe high solids environments .The steel cage front end design allows for proper flow of liquids while keeping the sensor at the bottom of the tank or well. The "Steel cage" design gives full protection and allows sensing to sewage levels no matter how much debris/mud /sand or rags build up.

Ventilation tube in the cable automatically compensates for changes in atmospheric pressure . The vent is protected with a filter eliminating moisture in the transducer. The circuit design can the under the input and output short-circuit conditions to prevent reverse connection .

Holykell can provide a cost effective solution for level monitoring for a variety of applications. Welcome your inquiry.



RoHS

Measuring range

bar	0...10
inWC	0...1000
psi	0...150
mH2O	0...100

When choosing the PTFE cable, only measuring ranges up to 0 ...10 bar, 0 ... 150 psi and 0 ... 100 mH2O are available. The given measuring ranges are also available in mbar, kPa and MPa

Materials

Wetted Parts	Standard	Optional
Case	Stainless steel 316L	316L SST/SUS321
Sensor	Stainless steel 316	
Cable	PE	FEP/PUR

Mounting position


Calibrated in vertical mounting position with pressure connection facing downwards.

Specifications

Ambient Temperature: 25°C (unless specified)


Parameter	HPT611				
Overload	200% F.S.				
Burst Pressure	300% F.S.				
Accuracy	$\leq \pm 0.5\% \text{F.S}$ (typical); $\leq \pm 0.25\% \text{F.S}$ (optional) @25 degree C				
(Linearity Hysteresis Repeatability)	Including non-lin., rep. and hys. Optional				
Long-term Stability	0.1%F.S \pm 0.05%/year				
Working Temp.	-40-80°C(non-corrosive medium)				
Storage Temp.	-40°C~80°C(Nitrile rubber sealing ring); -20°C~80°C(fluororubber rubber sealing ring)				
Temperature Compensation	0°C~50°C				
Medium compatible	Compatible with 316L Stainless Steel				
Electrical Wire	2 Wires	3 Wires			4 wires
Output	4-20mA	0-5V	0-10V	0.5-4.5V	RS485 Modbus RTU
Power Supply	7-30Vdc	8-30Vdc	13-30Vdc	5Vdc \pm 5%	3.5-36Vdc
Insulate resistance	> 100M Ω @50V				
Zero Temp. Drift	0.5%FS/°C ($\leq 100\text{kPa}$) ; 0.25%FS/°C ($> 100\text{kPa}$)				
FS Temp. Drift	0.02%FS/°C ($\leq 100\text{kPa}$) ,0.01%FS/°C ($> 100\text{kPa}$)				
Electronic connection	Over molded and Fixed cable with vented tube, IP68				
Process Connect	90mm (3.5") flange				
Body Diameter	28 mm				
Material of housing	Stainless Steel				
Response time	$\leq 10\text{ms}$				
Pressure Type	Gage pressure and absolute pressure optional				
Certificate	Exia IICT6 ,RoHS, CE Certificate				
EMC Standard	EN 61326-1:2013; EN 61326-2-3:2013 EN 61000-6-2:2005; EN61000-6-4:2007+A1				
IP Rating	IP68				




Dimensions and Drawing

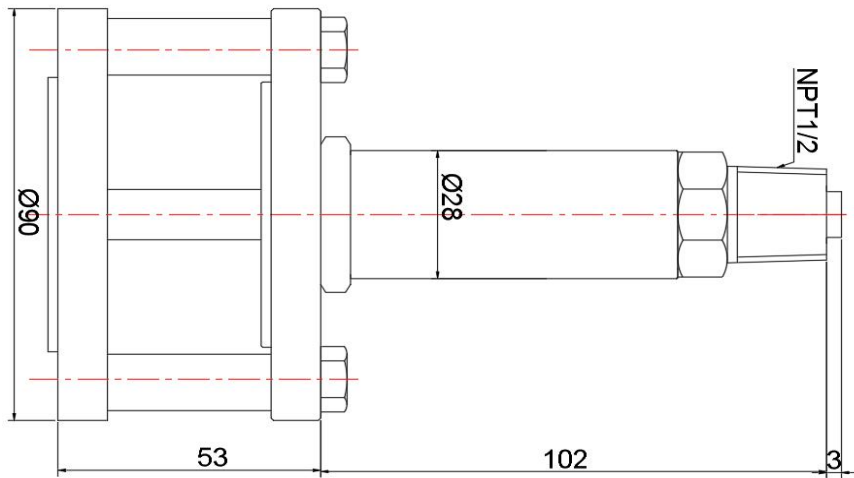

Unit: mm

Electrical Connections

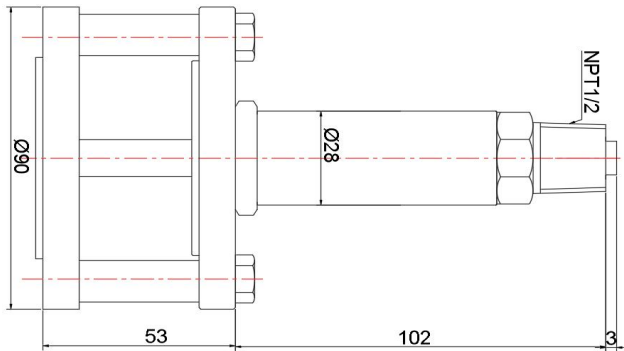

Direct cable outlet		
	Current	Red U+
		Green Iout(U-)
		Yellow \perp Connect to earth ground
	Voltage	Red U+
		Green Vout
		Yellow \perp Connect to earth ground
		Black U-
	RS485 RTU Modbus	Red U+
		Black U-
		Green RS485A
		Blue RS485B
		Yellow \perp Connect to earth ground

How to Order

1. Range Selection Table:

		01	0~1.0	02	0~1.1	03	0~1.2	04	0~1.3	05	0~1.4	06	0~1.5	07	0~1.6	08	0~1.7
09	0~1.8	10	0~1.9	11	0~2	12	0~2.1	13	0~2.2	14	0~2.3	15	0~2.4	16	0~2.5	17	0~3
18	0~4	19	0~5	20	0~6	21	0~7	22	0~8	23	0~10	24	0~12	25	0~15	26	0~16
27	0~20	28	0~25	29	0~30	30	0~35	31	0~40	32	0~50	33	0~60	34	0~80	35	0~100
										X	By Customized						

Kindly according to your application select suitable range code , Example: code 19 =5 .









Unit of measure select on the Part Number Selection Table . Example: Code H=mH₂O, that's 5mH₂O

2. Part Number Selection Table:

611	19	H	G	E5	S11	1	1	002
Selection Type								
Range	Range reference to range selection table code							
Pressure Unit	B=bar K=KPa H=mH ₂ O P=Psi M=MPa							
Pressure type	G=Gage/Relative A=Absolute							
Signal Output	E5=4-20mA(2 wires) E6=0-5V(3 wires) E7=0-10V(3 wires) E21=0.5-4.5V non-ratiometric (default, 3 wires) E8=0.5-4.5V ratiometric (by customized, 3 wires) E11=RS485(MODBUS) X= By Customized							
Power Supply	S6=5Vdc S12=8-30Vdc S43=13-30Vdc S11=7-30Vdc S42=3.5-36Vdc X= By Customized							
Pressure connection	1=Double 90mm(3.5") diameter flange							
Accuracy	1=0.5%F.S (Typical) 2=0.25%F.S optional							
Cable length	000=Non-Cable 001= Cable 1M 002= Cable 2M X= By Customized							

Accessories

(Notes: Please purchase separately. For the price of accessories, please contact our sales.)

	Description	Order number
	Liquid level display control device With all kinds of liquid level sensor, measurement according to liquid level, and according to the setting of the container structure and size and the density of liquid, calculation, display liquid volume or quality.	0008
	Flange 4 holes 316 SS flange, size can be customized	0001
	Locking flange For locking cables, made of aluminum alloy	0029
	Conduit adapter 316 SS 1/2" NPT male cable conduit adapter. Must be factory installed.	0011
	Terminal box The terminal box, with IP67 ingress protection and watertight ventilation element, provides a moisture-free electrical termination for the submersible pressure transmitter. It should be mounted in dry environment or directly in the switch cabinet.	0003
	Additional weight The additional weight increases the dead weight of the submersible pressure transmitter. It simplifies the lowering into monitoring wells, narrow shafts and deep wells. It effectively reduces negative environmental influences on the measuring result from the measured medium (e.g. turbulent flow). Stainless steel 316L, approx. 1.46kg, height (H) 70 mm	0009
	Adapter Converter It is able to convert RS-232 signal to RS-485 balanced differential signal and extend the communication distance to 1.2km. It uses a particular pump to gain power from RS-232 signal (RTS, DTR, TXD) without initializing the RS-232 series interface. This interface converter does this without requiring any AC or DC power.	0005
	Surge electrostatic protector Anti-surge $\pm 2000V/\pm 4000V$, anti-static 18KV, suitable for protecting 4-20ma and RS485 circuits.	0014

Ordering information

Model / Measuring range / Output signal / Temperature measurement / Cable material / Cable length / Case / Lightning protection / Accessories